


Bit Size Range		5-5/8 - 6-3/4 in	143 - 171 mm
Bit Box Connection		3-1/2 REGULAR	
Bearing Load On Bottom	Dynamic	71500 lbf	31800 daN
	Static	229350 lbf	102020 daN
Bearing Load Off Bottom	Dynamic	71500 lbf	31800 daN
	Static	229350 lbf	102020 daN
Max. Overpull (for re-run)		328000 lbf	146000 daN
Absolute Overpull		546000 lbf	243000 daN
Adjustable Makeup Torque		12000 ft-lbs	16270 Nm
A = Bit to Stabilizer (centre)	Adjustable	16.7 in	424 mm
	Fixed	56.3 in	1430 mm
B = Bit to Bend	Adjustable	45.7 in	1161 mm
	Fixed	45.7 in	1161 mm
C = Overall (with Dump Sub)		358.3 in	9101 mm
Weight		1485 lbs	673.6 kg

Lobe Configuration	8-9 Lobe 6.0 Stage HR	
Displacement (NO LOAD)	0.51 rev/gal	0.13 rev/l
Max. Differential @ FULL LOAD	1,410 psi	9,722 kPa
Max. Torque	6,910 ft-lbs	9,369 Nm
Max. Power	149 HP	111 kW

Flow Rate		Speed
GPM	LPM	RPM
150	568	48 - 80
215	814	81 - 110
280	1,060	113 - 140

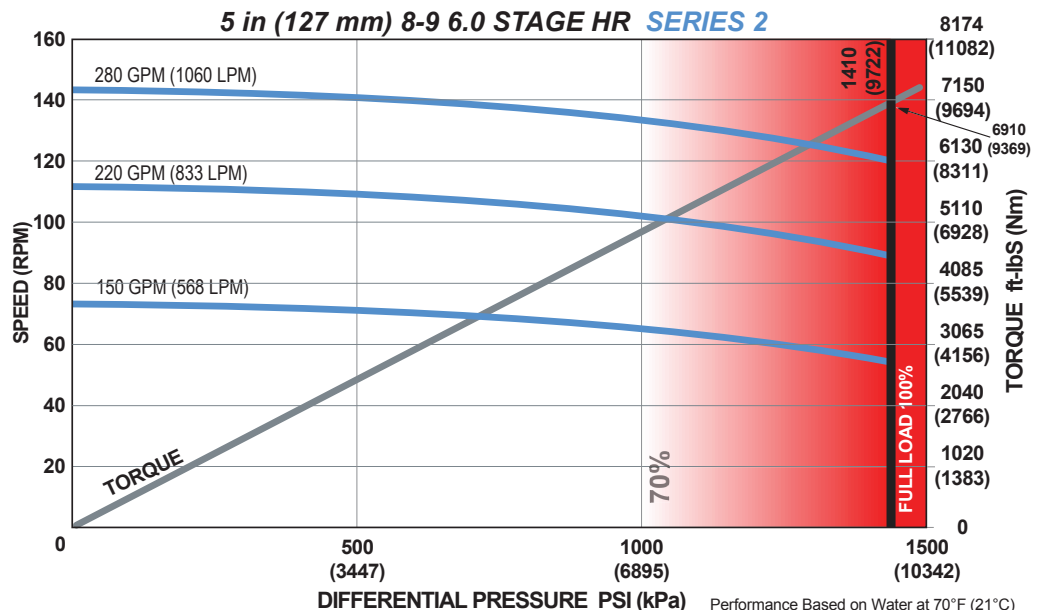

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE: 5 in (127 mm) 8-9 Lobe 6.0 Stage HR SERIES 2

Hole Size	SLICK				STABILIZED			
	5-7/8 (149 mm)	6 (152 mm)	6-1/8 (156 mm)	6-1/4 (159 mm)	5-7/8 (149 mm)	6 (152 mm)	6-1/8 (156 mm)	6-1/4 (159 mm)
BEND ANGLE	Degrees per 100 Feet (30 m)				Degrees per 100 Feet (30 m)			
0.39	1.83	1.49	1.14	0.80	0.61	0.62	0.69	0.75
0.78	4.26	3.91	3.57	3.22	3.32	3.26	3.19	3.13
1.15	6.56	6.21	5.87	5.52	5.90	5.83	5.76	5.70
1.50	8.74	8.39	8.05	7.70	8.33	8.26	8.20	8.13
1.83	10.79	10.44	10.10	9.75	10.62	10.56	10.49	10.43
2.12	12.59	12.25	11.90	11.55	12.64	12.58	12.51	12.44
2.38	14.21	13.86	13.52	13.17	14.45	14.38	14.32	14.25
2.60	15.57	15.23	14.88	14.54	15.98	15.91	15.85	15.78
2.77	16.63	16.28	15.94	15.59	17.16	17.09	17.03	16.96
2.90	17.44	17.09	16.75	16.40	18.06	18.00	17.93	17.87
2.97	17.87	17.53	17.18	16.84	18.55	18.48	18.42	18.35
3.00	18.06	17.71	17.37	17.02	18.76	18.69	18.63	18.56

FBH BUILD RATE: 5 in (127 mm) 8-9 Lobe 6.0 Stage HR SERIES 2

Hole Size	SLICK				STABILIZED			
	5-7/8 (149 mm)	6 (152 mm)	6-1/8 (156 mm)	6-1/4 (159 mm)	5-7/8 (149 mm)	6 (152 mm)	6-1/8 (156 mm)	6-1/4 (159 mm)
BEND ANGLE	Degrees per 100 Feet (30 m)				Degrees per 100 Feet (30 m)			
1.25	7.06	6.65	6.24	5.83	6.35	6.29	6.22	6.16
1.50	8.62	8.21	7.79	7.38	8.04	7.98	7.91	7.85
1.75	10.17	9.76	9.35	8.93	9.73	9.67	9.60	9.54
2.00	11.73	11.31	10.90	10.49	11.42	11.36	11.29	11.23
2.25	13.28	12.87	12.46	12.04	13.11	13.05	12.98	12.92
2.50	14.84	14.42	14.01	13.60	14.80	14.74	14.67	14.61

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.