


Bit Size Range		9-7/8 - 12-1/4 in	251 - 311 mm
Bit Box Connection		6-5/8 REGULAR	
Bearing Load On Bottom	Dynamic	145951 lbf	64920 daN
	Static	534312 lbf	237670 daN
Bearing Load Off Bottom	Dynamic	145951 lbf	64920 daN
	Static	534312 lbf	237670 daN
Max. Overpull (for re-run)		542500 lbf	241000 daN
Absolute Overpull		904100 lbf	402000 daN
Adjustable Makeup Torque		40000 ft-lbs	54233 Nm
A = Bit to Stabilizer (centre)		23.5 in	597 mm
B = Bit to Bend	Adjustable	74.9 in	1902 mm
	Fixed	60 in	1524 mm
C = Overall (with Dump Sub)		390.2 in	9911 mm
Weight		3205.2 lbs	1453.9 kg

Lobe Configuration	6-7 Lobe 5.0 Stage HR	
Displacement (NO LOAD)	0.17 rev/gal	0.04 rev/l
Max. Differential @ FULL LOAD	1,260 psi	8,687 kPa
Max. Torque	17,076 ft-lbs	23,152 Nm
Max. Power	445 HP	332 kW

Flow Rate		Speed
GPM	LPM	RPM
300	1,136	28 - 51
600	2,271	83 - 106
900	3,407	137 - 160

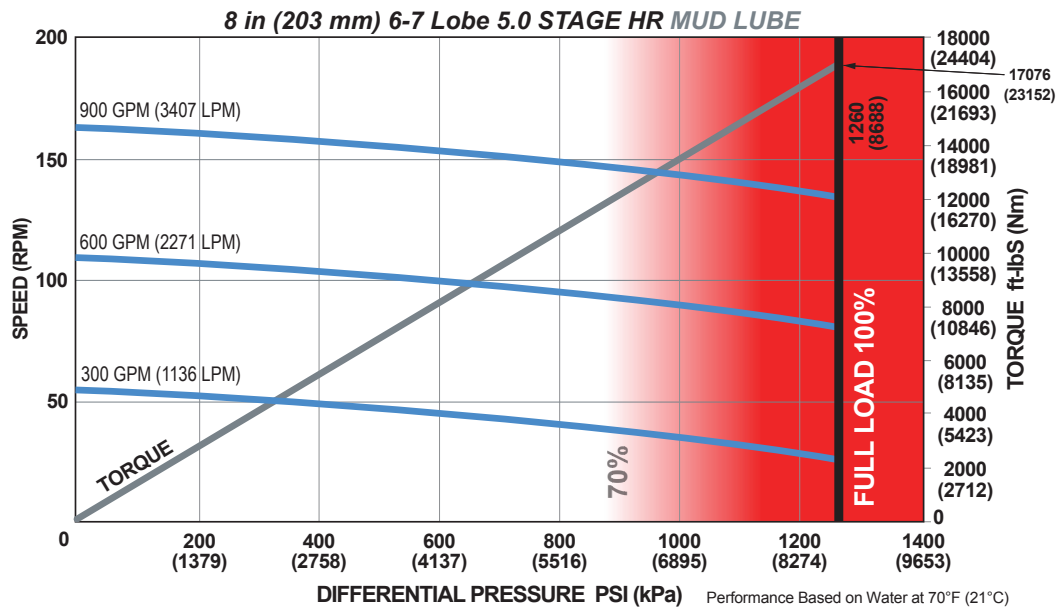

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

ADJUSTABLE BUILD RATE: 8 in (203 mm) 6-7 Lobe 5.0 Stage HR MUD LUBE

Hole Size	SLICK			STABILIZED		
	9-7/8 (251 mm)	10-5/8 (270 mm)	12-1/4 (311 mm)	9-7/8 (251 mm)	10-5/8 (270 mm)	12-1/4 (311 mm)
BEND ANGLE	Degrees per 100 Feet (30 m)			Degrees per 100 Feet (30 m)		
0.39	-	-	-	1.48	1.81	2.53
0.78	1.63	0.23	-	3.44	3.72	4.44
1.15	3.72	2.32	-	5.84	5.52	6.25
1.50	5.71	4.31	1.27	8.11	7.77	7.95
1.83	7.58	6.18	3.14	10.24	9.91	9.56
2.12	9.22	7.82	4.78	12.12	11.79	11.07
2.38	10.69	9.29	6.26	13.80	13.47	12.75
2.60	11.94	10.54	7.50	15.23	14.89	14.17
2.77	12.90	11.50	8.46	16.33	15.99	15.27
2.90	13.64	12.24	9.20	17.17	16.83	16.11
2.97	14.03	12.63	9.60	17.62	17.29	16.57
3.00	14.20	12.80	9.77	17.81	17.48	16.76

FBH BUILD RATE: 8 in (203 mm) 6-7 Lobe 5.0 Stage HR MUD LUBE

Hole Size	SLICK			STABILIZED		
	9-7/8 (251 mm)	10-5/8 (270 mm)	12-1/4 (311 mm)	9-7/8 (251 mm)	10-5/8 (270 mm)	12-1/4 (311 mm)
BEND ANGLE	Degrees per 100 Feet (30 m)			Degrees per 100 Feet (30 m)		
1.25	3.71	2.02	-	6.19	6.30	7.02
1.50	5.13	3.44	-	7.75	7.58	8.30
1.75	6.55	4.86	1.19	9.31	8.98	9.58
2.00	7.96	6.27	2.61	10.87	10.54	10.86
2.25	9.38	7.69	4.02	12.43	12.10	12.13
2.50	10.80	9.10	5.44	13.99	13.66	13.41

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.