




<b>Bit Size Range</b>	7-7/8 - 9-7/8 in	200 - 251 mm
<b>Bit Box Connection</b>	4-1/2 REGULAR	
<b>Dynamic Bearing Load On/Off Bottom</b>	128500 lbf	57200 daN
<b>Static Bearing Load On/Off Bottom</b>	404500 lbf	179900 daN
<b>Max. Overpull (For Re-run)</b>	406900 lbf	181000 daN
<b>Absolute Overpull</b>	678200 lbf	301700 daN
<b>Adjustable Makeup Torque</b>	25000 ft-lbs	33900 Nm
<b>Stab/Thread Protector Makeup Torque</b>	12000 ft-lbs	16300 Nm
<b>A = Bit to Stabilizer (Centre)</b>	17.5 in	0.44 m
<b>B = Bit to Bend</b>	<b>Adjustable</b> 73 in	1.85 m
	<b>Fixed</b> 61.1 in	1.55 m
<b>C = Overall (With Dump Sub)</b>	391.1 in	9.93 m
<b>Weight</b>	2879 lb	1306 kg

<b>Lobe Configuration</b>	7-8 Lobe 5.7 Stage HR	
<b>Displacement (No Load)</b>	0.23 rev/gal	0.06 rev/l
<b>Max. Differential (Full Load)</b>	1340 psi	9239 kPa
<b>Max. Torque</b>	14200 ft-lbs	19253 Nm
<b>Max. Power</b>	376 HP	280 kW

Flow Rate		Speed
GPM	LPM	RPM
300	51136	48 - 70
500	1893	94 - 116
700	2650	139 - 161

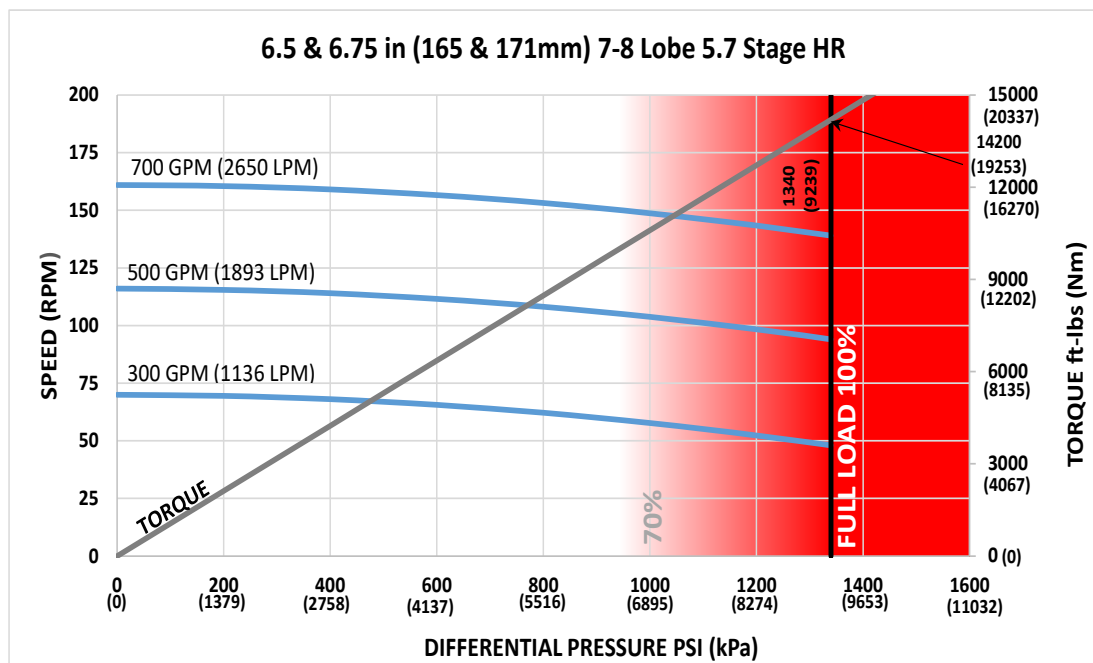

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

### ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	1.1	-	-	-	1.8	2.2	2.3	-
0.78	3.6	2.3	1.7	-	3.9	4.3	4.4	5.0
1.15	6.0	4.6	4.1	1.6	6.0	6.3	6.4	7.0
1.50	8.3	6.9	6.3	3.9	8.3	8.2	8.3	8.9
1.83	10.4	9.0	8.5	6.0	10.4	9.9	10.1	10.7
2.12	12.2	10.9	10.3	7.9	12.2	11.5	11.6	12.2
2.38	13.9	12.5	12.0	9.5	13.9	12.9	13.0	13.6
2.60	15.3	14.0	13.4	10.9	15.3	14.1	14.2	14.8
2.77	16.4	15.1	14.5	12.0	16.4	15.1	15.1	15.7
2.90	17.3	15.9	15.3	12.9	17.3	15.9	15.8	16.4
2.97	17.7	16.3	15.8	13.3	17.7	16.3	16.2	16.8
3.00	17.9	16.5	16.0	13.5	17.9	16.5	16.4	17.0

Note: Stabilizers are 1/8" undergauge

### FBH BUILD RATE


Hole Size	SLICK				STABILIZED			
	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)	7-7/8 (200mm)	8-1/2 (216mm)	8-3/4 (222mm)	9-7/8 (251mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	6.4	4.8	4.1	1.3	6.7	7.1	7.2	7.8
1.50	8.0	6.4	5.7	2.9	8.2	8.5	8.6	9.2
1.75	9.6	8.0	7.3	4.5	9.6	9.9	10.0	10.6
2.00	11.2	9.6	9.0	6.1	11.2	11.3	11.4	12.0
2.25	12.8	11.2	10.6	7.7	12.8	12.7	12.8	13.4
2.50	14.4	12.8	12.2	9.3	14.4	14.1	14.2	14.8

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.

For custom motor configurations and build rates, please contact your DYNOMAX office.

**FISHING DIMENSIONS**

USC - IMPERIAL (Lengths, Diameters = in)  
SI - METRIC (Lengths = m, Diameters = mm)

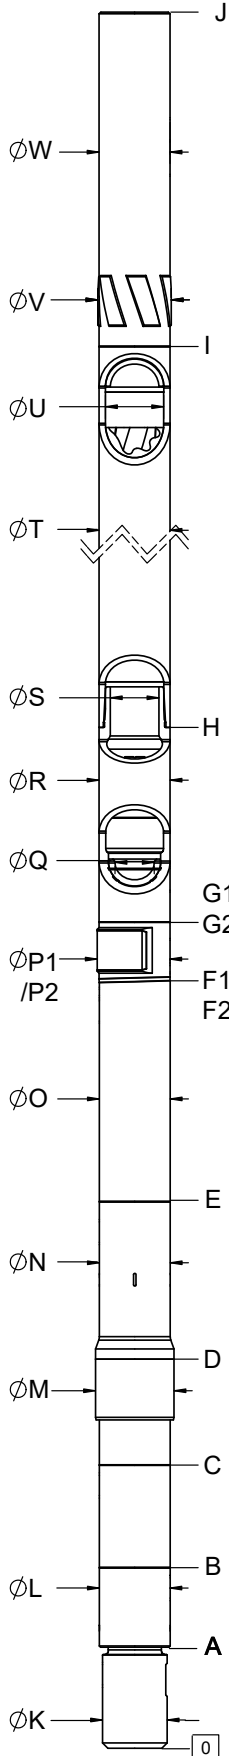

EXTERNALS		USC	SI
END CAP	A	9.9	0.25
BEARING HOUSING	B	17.5	0.44
PISTON HOUSING	C	27.3	0.69
STABILIZER SHOULDER	D	37.9	0.96
KICK/FIXED HOUSING	E	51.3	1.30
BIT TO BEND (ADJUSTABLE)	F1	73.0	1.85
ADAPTOR HOUSING (ADJUSTABLE)	G1	78.8	2.00
BIT TO BEND (FIXED)	F2	61.1	1.55
ADAPTOR HOUSING (FIXED)	G2	73.5	1.87
STATOR START	H	98.1	2.49
STATOR END	I	358.1	9.10
OVERALL LENGTH	J	391.1	9.93
BIT BOX Ø	K	6.38	162.1
END CAP/BEARING HOUSING Ø	L	6.56	166.6
THREAD PROTECTOR Ø	M	7.13	181.1
PISTON HOUSING Ø	N	6.81	173.0
KICK/FIXED HOUSING Ø	O	6.81	173.0
PAD (ADJUSTABLE) Ø	P1	7.13	181.1
PAD (FIXED) Ø	P2	7.13	181.1
ADJUSTABLE MANDREL PIN Ø	Q	3.88	98.6
ADAPTOR HOUSING Ø	R	6.81	173.0
ADAPTOR PIN Ø	S	4.80	121.9
STATOR TUBE OUTER Ø	T	6.75	171.5
STATOR TUBE INNER Ø	U	5.50	139.7
ROTOR CATCH SUB BLADE Ø	V	7.00	177.8
ROTOR CATCH SUB Ø	W	6.81	173.0



INTERNALS		USC	SI
BIT BOX	A	9.3	0.24
THRUST SHOULDER	B	21.3	0.54
WASHPIPE START	C	25.4	0.65
HEX END	D	33.5	0.85
BEARING ASSEMBLY ADAPTOR	E	49.6	1.26
BAA CAP	F	63.4	1.61
ROTOR ADAPTOR CAP	G	89.1	2.26
ROTOR START	H	98.2	2.49
ROTOR END	I	350.2	8.90
CATCH STEM	J	367.7	9.34
BIT BOX Ø	K	6.38	162.1
MANDREL Ø	L	4.75	120.7
THRUST Ø	M	3.38	85.9
WASHPIPE LARGE Ø	N	4.38	111.3
WASHPIPE SMALL Ø	O	3.63	92.2
BEARING ASSEMBLY ADAPTOR Ø	P	4.86	123.4
DRIVESHAFT Ø	Q	2.76	70.1
ROTOR ADAPTOR Ø	R	4.86	123.4
ROTOR MAJOR DIA. Ø	S	4.65	118.1
ROTOR CATCH STEM Ø	T	3.19	81.0

This information is for reference only. Assemblies are displayed in an "Adjustable Configuration"

Rotor Catch and Rotor Catch Float Sub Lengths may vary based on configuration, and use of Dump Subs or combination Rotor Catch and Float Housings.

If any additional information is required, please contact your local DYNOMAX office.