



# 9.62 in (244mm) Bottom w/ 8.25 in (210mm) 7-8 Lobe 5.3 Stage HR MUD LUBE

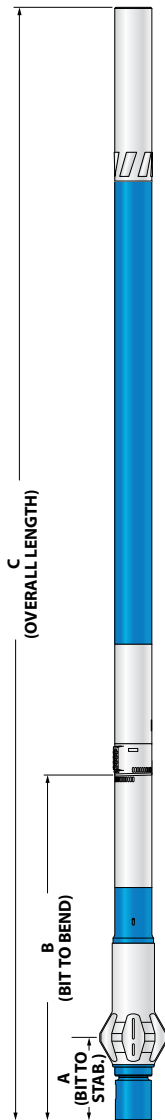

<b>Bit Size Range</b>	12-1/4 - 17-1/2 in	311 - 445 mm
<b>Bit Box Connection</b>	6-5/8 or 7-5/8 REGULAR	
<b>Dynamic Bearing Load On/Off Bottom</b>	188513 lbf	83900 daN
<b>Static Bearing Load On/Off Bottom</b>	1092750 lbf	486100 daN
<b>Max. Overpull (For Re-run)</b>	721400 lbf	320900 daN
<b>Absolute Overpull</b>	1202300 lbf	534800 daN
<b>Adjustable Makeup Torque</b>	60000 ft-lbs	81300 Nm
<b>Stab/Thread Protector Makeup Torque</b>	38000 ft-lbs	51500 Nm
<b>A = Bit to Stabilizer (Centre)</b>	24.58 in	0.62 m
<b>B = Bit to Bend</b>	<b>Adjustable</b>	88.3 in / 2.24 m
	<b>Fixed</b>	72.8 in / 1.85 m
<b>C = Overall (With Dump Sub)</b>	457.2 in	11.61 m
<b>Weight</b>	5703 lb	2587 kg

<b>Lobe Configuration</b>	7-8 Lobe 5.3 Stage HR	
<b>Displacement (No Load)</b>	0.11 rev/gal	0.03 rev/l
<b>Max. Differential (Full Load)</b>	1250 psi	8618 kPa
<b>Max. Torque</b>	27320 ft-lbs	37041 Nm
<b>Max. Power</b>	499 HP	372 kW

Flow Rate		Speed
GPM	LPM	RPM
600	2271	52 - 65
800	3028	74 - 88
1000	3785	96 - 110

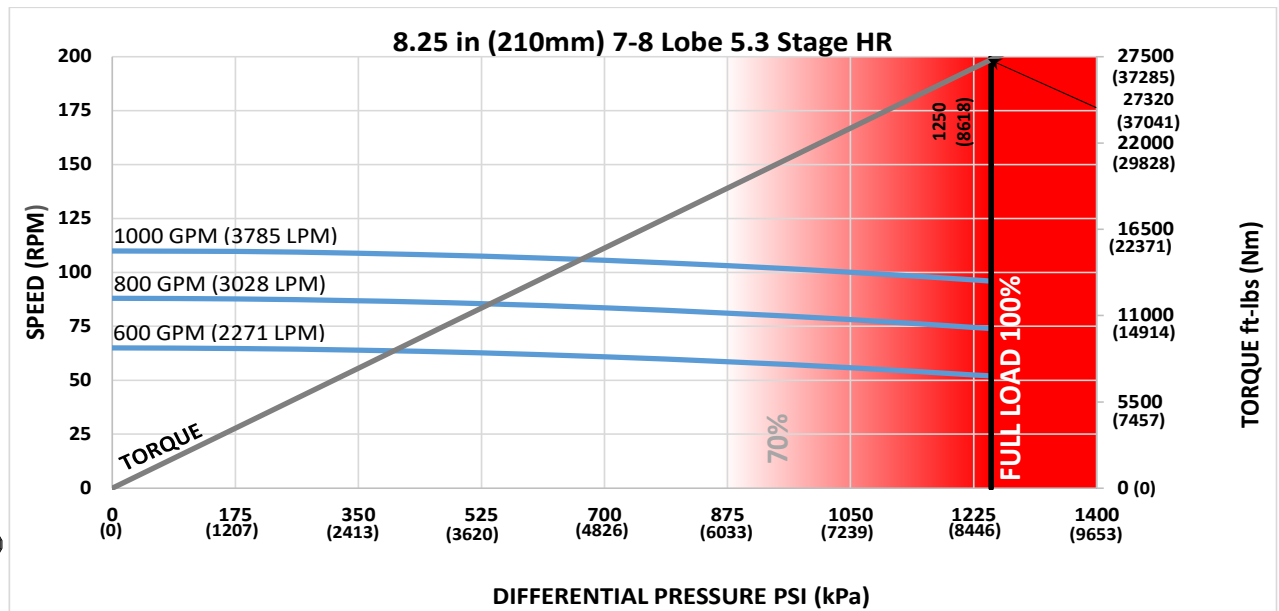

Possible damage may occur when motor is run higher than 70% of Maximum Differential Pressure.

### ADJUSTABLE BUILD RATE

Hole Size	SLICK				STABILIZED			
	12-1/4 (311mm)	14 (356mm)	16 (406mm)	17-1/2 (445mm)	12-1/4 (311mm)	14 (356mm)	16 (406mm)	17-1/2 (445mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
0.39	-	-	-	-	2.7	3.4	-	-
0.78	1.8	-	-	-	4.5	5.2	6.0	6.6
1.15	3.8	1.2	-	-	6.2	6.9	7.7	8.3
1.50	5.8	3.1	0.1	-	7.8	8.5	9.3	9.9
1.83	7.6	4.9	1.9	-	9.3	10.0	10.8	11.4
2.12	9.1	6.5	3.5	1.2	10.7	11.4	12.1	12.7
2.38	10.6	7.9	4.9	2.6	11.9	12.6	13.3	13.9
2.60	11.8	9.1	6.1	3.8	12.9	13.6	14.4	14.9
2.77	12.7	10.0	7.0	4.7	13.7	14.3	15.1	15.7
2.90	13.4	10.8	7.7	5.5	14.3	14.9	15.7	16.3
2.97	13.8	11.1	8.1	5.8	14.6	15.3	16.1	16.6
3.00	14.0	11.3	8.3	6.0	14.7	15.4	16.2	16.8

Note: Stabilizers are 1/8" undergauge

### FBH BUILD RATE


Hole Size	SLICK				STABILIZED			
	12-1/4 (311mm)	14 (356mm)	16 (406mm)	17-1/2 (445mm)	12-1/4 (311mm)	14 (356mm)	16 (406mm)	17-1/2 (445mm)
<b>BEND ANGLE</b>	Degrees per 100 Feet (30m)				Degrees per 100 Feet (30m)			
1.25	4.2	1.1	-	-	6.9	7.6	8.4	9.0
1.50	5.6	2.4	-	-	8.1	8.8	9.6	10.2
1.75	6.9	3.8	0.2	-	9.3	10.0	10.8	11.4
2.00	8.3	5.2	1.6	-	10.5	11.2	12.0	12.6
2.25	9.7	6.5	3.0	0.3	11.7	12.4	13.2	13.8
2.50	11.0	7.9	4.3	1.7	13.0	13.6	14.4	15.0

This information is for reference only. Build rates are theoretical calculations using three-point geometry and new motor builds. Actual rate predictions will depend on formation characteristics, bit profiles, and WOB.


For custom motor configurations and build rates, please contact your DYNOMAX office.

**FISHING DIMENSIONS**

USC - IMPERIAL (Lengths, Diameters = in)  
SI - METRIC (Lengths = m, Diameters = mm)

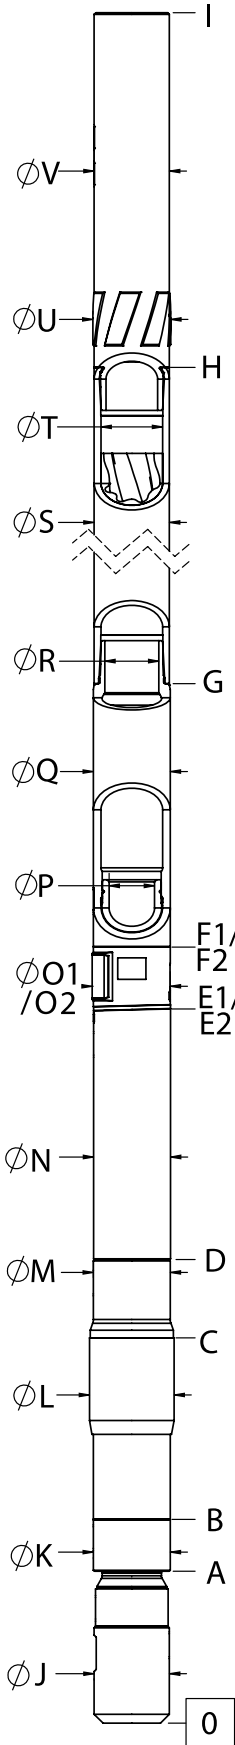

EXTERNALS		USC	SI
LOWER HSG FLOW REST.	A	16.0	0.41
BEARING HOUSING START	B	23.1	0.59
STABILIZER SHOULDER	C	49.1	1.25
BEARING HOUSING END	D	59.5	1.51
BIT TO BEND (ADJUSTABLE)	E1	88.3	2.24
ADAPTOR HOUSING (ADJUSTABLE)	F1	95.6	2.43
BIT TO BEND (FIXED)	E2	72.8	1.85
ADAPTOR HSG (FIXED)	F2	85.0	2.16
STATOR START	G	119.7	3.04
STATOR END	H	419.7	10.66
OVERALL LENGTH	I	457.2	11.61
BIT BOX $\phi$	J	6.00	152.4
LOWER HOUSING FLOW RESTRICTOR $\phi$	K	6.62	168.1
THREAD PROTECTOR $\phi$	L	10.75	273.1
BEARING HOUSING $\phi$	M	9.62	244.3
KICK OR FIXED HSG $\phi$	N	9.62	244.3
KICK PAD $\phi$ (ADJUSTABLE)	O1	10.13	257.3
KICK PAD $\phi$ (FIXED)	O2	10.13	257.3
ADJ MANDREL PIN $\phi$	P	5.60	142.2
ADAPTOR HOUSING $\phi$	Q	9.62	244.3
ADAPTOR HOUSING PIN $\phi$	R	5.65	143.5
STATOR TUBE OUTER $\phi$	S	8.25	209.6
STATOR TUBE INNER $\phi$	T	6.50	165.1
ROTOR CATCH SUB BLADE $\phi$	U	8.25	209.6
ROTOR CATCH $\phi$	V	8.00	203.2

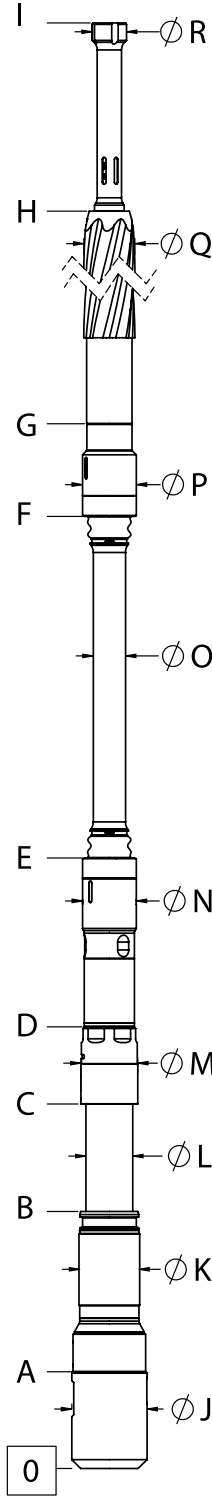

INTERNALS		USC	SI
BIT BOX	A	11.0	0.28
LOWER SHAFT FLOW RESTRICTOR DIAMETER	B	29.1	0.74
COMPRESSION NUT	C	45.1	1.15
BEARING ASSEMBLY ADAPTOR	D	53.7	1.36
BAA ADAPTOR CAP	E	75.8	1.93
ROTOR ADAPTOR CAP	F	109.2	2.77
ROTOR START	G	119.0	3.02
ROTOR	H	411.0	10.44
CATCH STEM	I	427.0	10.85
BIT BOX $\phi$	J	9.00	228.6
FLOW RESTRICTOR $\phi$	K	7.06	179.3
MANDREL $\phi$	L	5.71	145.0
COMPRESSION NUT $\phi$	M	6.79	172.5
BEARING ASSEMBLY ADAPTOR $\phi$	N	7.10	180.3
DRIVESHAFT $\phi$	O	3.89	98.8
ROTOR ADAPTOR $\phi$	P	7.10	180.3
ROTOR MAJOR $\phi$	Q	5.51	140.0
ROTOR CATCH HEAD $\phi$	R	4.38	111.3

This information is for reference only. Assemblies are displayed in an "Adjustable Configuration"

Rotor Catch and Rotor Catch Float Sub Lengths may vary based on configuration, and use of Dump Subs or combination Rotor Catch and Float Housings.

If any additional information is required, please contact your local DYNOMAX office.